




## DESCRIPTION

The P3AC24-16-8L is a UL listed CCTV power center engineered to manage remote camera and accessory power requirements. The P3AC24-16-8L distribution module is designed with 16 individually fused outputs for powering up to 16 CCTV cameras and accessories.


It will provide 24Volts AC to sixteen fused outputs with a total of 8.0 Amps continuous supply current via two 4.0 Amp supplies. The P3AC24-16-8L power center is housed in the premium P3 heavy gauge metal enclosure.

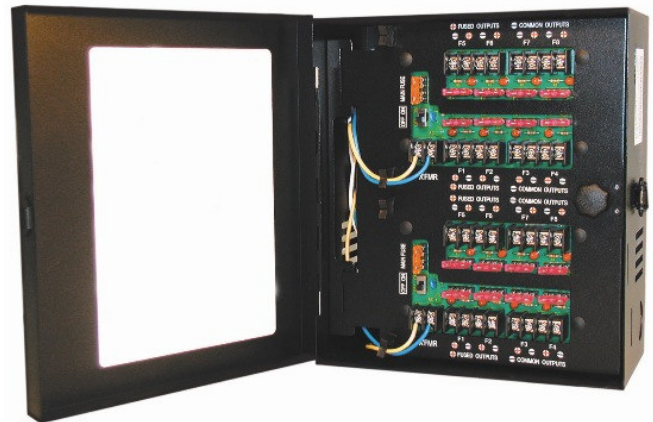

## FEATURES

- Convenient screw terminal and fuse access.
- Separation panel between transformers and output access.
- Power ON/OFF switch.
- AC power LED indicator.
- Individual LED's for each fused output.
- Lockable heavy gauge metal enclosure.
- Double coated polyurethane finish.
- Multiple knockouts to accommodate various wiring configurations.
- Uses easy to find automotive style fuses.
- Includes transformers and spare fuses.
- Available in 28VAC version (non - UL).
- Available with optional circuit breaker, **P3AC24-16-8CB** (non - UL).

## SPECIFICATIONS

- Input 115VAC 50/60 HZ; 1.8 Amps.
- Sixteen 24VAC individually fused outputs.
- Two 4 Amp 100 VA supply currents at 70°F.
- Output fuses are rated at 3 Amps.
- Main fuses are rated at 5 Amps.
- UL listed  us
- Unit maintains camera synchronization.
- Two (2) 110VAC/24VAC, 100VA Transformers.
- Enclosure dimensions: 10" (H) x 9" (W) x 4.5" (D).